


SHUT OFF AIR OIL PULSE WRENCH-PISTOL TYPE

Features:

1. Reliable torque precision and rapid shut-off effect
2. Improvement of efficiency and reduction of cost
3. Reduce labour intensity of operators
4. Contribution to environmental protection - Low noise, low vibration and small reaction force

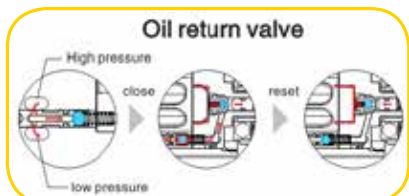

OBT-50PD



Torque: 1.0kg.m = 9.807Nm = 7.233ft.lb

Model	Bolt Capacity (mm)	Torque Range (Nm)	Drive size (in)	Free speed (rpm)	Length (mm)	Net weight (kg)	Air inlet (in)	Air hose size (mm)	Air consumption (m ³ /min)	Noise level (dBA)
OBT-50PD	5-6	7-16	3/8	4,800	160.5	0.92	1/4	6.5	0.25	78
OBT-60PD	8	20-32	3/8	6,000	170	0.95	1/4	8.0	0.35	80
OBT-70PD	8-10	30-50	3/8	5,800	183	1.05	1/4	8.0	0.40	80
OBT-80PD	8-10	42-60	3/8	6,000	187	1.25	1/4	8.0	0.48	80
OBT-81PD	10	50-65	1/2	6,000	192	1.25	1/4	8.0	0.48	80
OBT-90PD	10-12	55-85	1/2	4,800	192	1.45	1/4	8.0	0.53	82
OBT-100PD	12	75-115	1/2	4,500	198	1.70	1/4	8.0	0.55	82
OBT-130PD	12-14	90-145	1/2	3,800	215	2.30	1/4	12.7	0.70	82
OBT-150PD	14-16	130-205	3/4	3,400	243.5	2.90	1/4	12.7	0.70	82

NON SHUT-OFF OIL PULSE WRENCH-PISTOL TYPE



OBN-50PD



Torque: 1.0kg.m = 9.807Nm = 7.233ft.lb

Model	Bolt Capacity (mm)	Torque Range (Nm)	Drive size (in)	Free speed (rpm)	Length (mm)	Net weight (kg)	Air inlet (in)	Air hose size (mm)	Air consumption (m ³ /min)	Noise level (dBA)
OBN-30PD	5-6	6-12	3/8	4,000	133	0.70	1/4	6.5	0.20	75
OBN-40PD	6	13-22	3/8	4,000	133	0.70	1/4	6.5	0.20	75
OBN-50PD	6-8	20-35	3/8	7,000	140	0.77	1/4	6.5	0.30	78
OBN-60PD	8-10	35-50	3/8	6,500	140	0.82	1/4	8.0	0.40	80
OBN-70PD	10	40-60	3/8	6,000	153	0.95	1/4	8.0	0.45	80
OBN-90PD	12	80-100	1/2	5,200	170	1.30	1/4	8.0	0.53	82
OBN-100PD	12-14	90-125	1/2	4,600	177	1.66	1/4	8.0	0.58	80