


# TAG ANGLE GRINDER

## Heavy Industrial Duty

TOKU Air Angle Grinders are designed with high power motor and speed control governor to deliver that continuous high cutting torque for maximum metal removal. Quality parts are used to ensure long durability under very heavy usage and minimum vibration to reduce operator's fatigue. Diffuse exhaust silencer lower operator's stress and prevent dusty particles blowing into other operator.

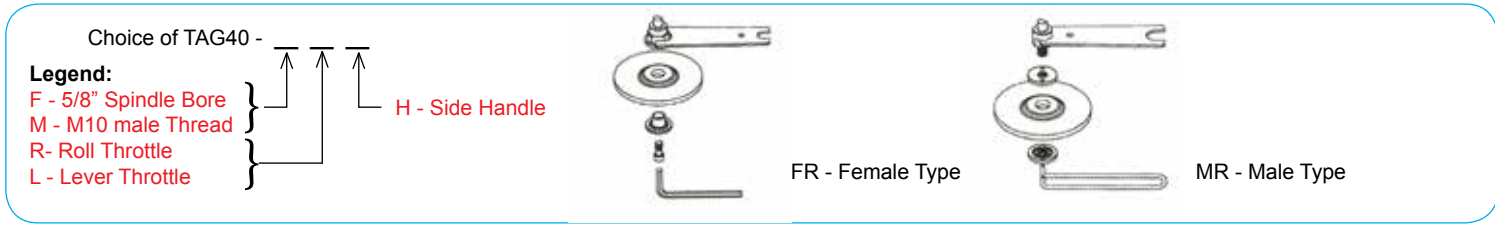

**TAG-20NR** - 2" Angle Grinder Safety Roll Throttle



**TAG-40FR** - 4" Angle Grinder Roll Throttle (Female Thread)  
**TAG-40MR** - 4" Angle Grinder Roll Throttle (Male Thread)



**TAG-40FRH** - Side Handle & Roll Throttle  
**TAG-40FLH** - Side Handle & Lever Throttle



**TAG-400** - 4" Angle Grinder Safety Roll Throttle  
**TAG-400QJL** - 4" Angle Grinder Safety Lever Throttle



**TAG-40SA** - 4" Angle Grinder Roll Throttle



**TAG-40SML** - Safety Lever Throttle (M10 Male Thread)  
**TAG-40SAL** - Safety Lever Throttle (Female Thread)

Specifications: Air Pressure 6kg/cm<sup>2</sup>

Model	Wheel Size (mm)	Bore Size (mm)	Throttle	Net Weight (kg)	Overall Length (mm)	Free Speed (rpm)	Avg. Air Cons (m <sup>3</sup> /min)	Air Inlet (pt)	Hose Size (in)	Power (HP)
TAG-20NR	58	9.5	Roll	0.55	162	12,500	0.5	¼	⅜	0.4
TAG-40SA	100	16	Roll	1.4	204	12,000	0.6	¼	½	0.7
TAG-40SAL	100	16	Safety Lever	1.4	204	12,000	0.6	¼	½	0.7
TAG-40SML	100	M10	Safety Lever	1.4	210	12,000	0.6	¼	½	0.7
TAG-40MR	100	M10	Roll	1.4	195	12,000	1.0	¼	⅜	0.9
TAG-40FR	100	16	Roll	1.4	195	12,000	1.0	¼	⅜	0.9
TAG-40FRH	100	16	Roll	1.8	217.5	12,000	1.0	¼	⅜	0.9
TAG-40FLH	100	16	Safety Lever	1.6	213.5	12,000	1.0	¼	⅜	0.9
TAG-400	100	16	Roll	1.7	220	12,000	0.5	⅜	½	0.7
TAG-400QJL	100	16	Safety Lever	1.8	266	12,000	0.5	⅜	½	0.7