

AA SERIES & THA SERIES



AA-0B - 2.0kg

AA-1.3B - 4.5kg

AA-3B - 5.8kg

THA-4S RV - 7.0kg

TOKU Chipping Hammers are proven reliable and durable, meeting all demand at any construction worksites.


- Easy to handle – Good weight balance
- Least vibration at handle to reduce fatigue
- Precision spool valve design system to ensure maximum power against light body weight

Optional Accessories for AA-0B

Model	Description	Length (mm)	Shank Size 12 x 53mm
M8N / M8L	Moil Point	220 / 300	
C8N	Chisel	220	
C8NL	Long Chisel	300	

Optional Accessories for AA-1.3B, AA-3B & THA-4S RV

Model	Description	Length (mm)	Shank Size 15 x 60mm
M3N	Moil Point	300	
M3NL	Long Moil Point	600	
C3N	Chisel	300	
C3NL	Long Chisel	586	
D3	Asphalt Cutter	290	

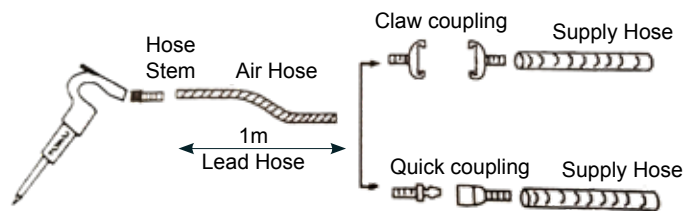

Note: To prevent hose stem breakage, suspend air hose to reduce stress to it

Specifications: Air Pressure 6kg/cm²

Model	Piston Diameter (mm)	Piston Stroke (mm)	Blow Per Min (bpm)	Net Weight (kg)	Overall Length (mm)	Avg. Air Cons		Air Inlet		Hose Size	
						m ³ /min	cfm	mm	pt	mm	in
AA-0B	20.00	50	3,600	2.0	254	0.35	12.4	9.5	3/8	12.7	1/2
AA-1.3B	24.00	58	2,800	4.5	320	0.45	15.9	9.5	3/8	12.7	1/2
AA-3B	28.00	79	2,400	5.8	330	0.45	15.9	9.5	3/8	12.7	1/2
THA-4S RV	28.54	102	1,800	7.0	480	0.95	33.5	9.5	3/8	12.7	1/2

SAND RAMMER & TAMPER

TOKU Tampers are ideal for compacting backfill for trenches. They are also commonly used in sand casting foundry.

T-6

TF-1N
TF-2N

TB-00G
TB-0G

TB-1N

Specifications: Air Pressure 6kg/cm²

Model	Piston Diameter (mm)	Piston Stroke (mm)	Blow Per Min (bpm)	Net Weight (kg)	Overall Length (mm)	Avg. Air Cons		Air Inlet		Hose Size	
						m ³ /min	cfm	mm	pt	mm	in
TB-00G	18.0	50	1,600	1.7	280	0.25	8.0	9.5	3/8	12.7	1/2
TB-0G	22.0	65	1,000	2.7	395	0.30	9.6	9.5	3/8	12.7	1/2
TB-1N	25.4	100	800	5.4	510	0.70	22.4	9.5	3/8	12.7	1/2
TF-1N	25.4	100	800	6.8	1,070	0.70	22.4	12.7	1/2	12.7	1/2
TF-2N	32.0	125	700	9.0	1,105	0.85	27.2	12.7	1/2	12.7	1/2
T-6	38.0	140	750	18.0	1,240	1.10	35.2	12.7	1/2	12.7	1/2